

Use of Panels with Internal Locks

Panels with internal locks are used primarily for the screen opening side panels and valance.


Each Lokpanel has two locks on each side, usually on opposite sides of the panel.

Hex screws that actuate lock mechanism are 5 mm., hex wrenches are included in shipment.

Hex screws only need to be hand tight. Do not overtighten.

Locks removed by first removing the hex screw, and then pulling out the lock mechanism.


Side of panel with the openings for the hex screws are always stage rear.

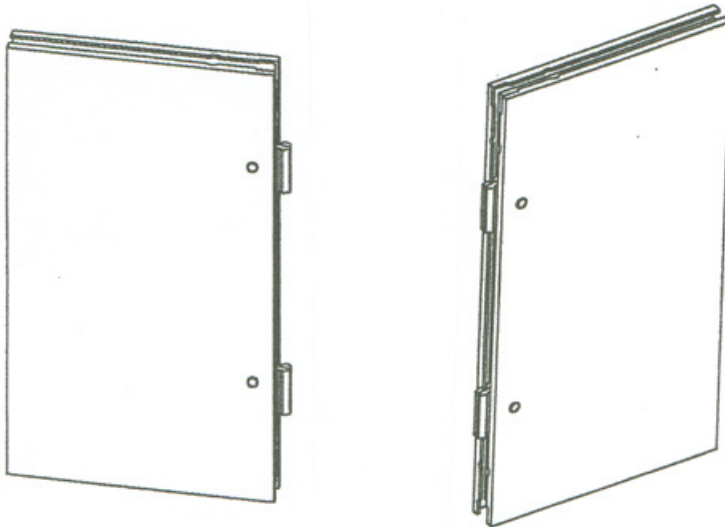

Locks are staggered so as not to interfere with locks on opposite panels.

Internal Lock Components

LB1 Nylon Bushing



CL Aluminum Cam Lock

